



DOWN LIGHT SUNRISE FAMILY




APPLICATION

Direct replacement for luminaires with compact PMMA diffuser and wide beam angle, comes with different color solution to choose. With efficacy up to 100 lm/w. You can install it for: public areas, stairways, corridors, foyers, shops, etc....

TECHNICAL INFORMATION

FAMILY	SUNRISE
Wattage	18W 25W
CRI	80 90
CCT	2700K 3000K 3500K 4000K 5000K 5700K 6500K
Beam	100°
Lumen	1980.0lm 2750.0lm
Finish	Black White
Material	Die-casting aluminum body and heatsink, PMMA or PS diffuser
Driver	Tridonic Philips Lifud

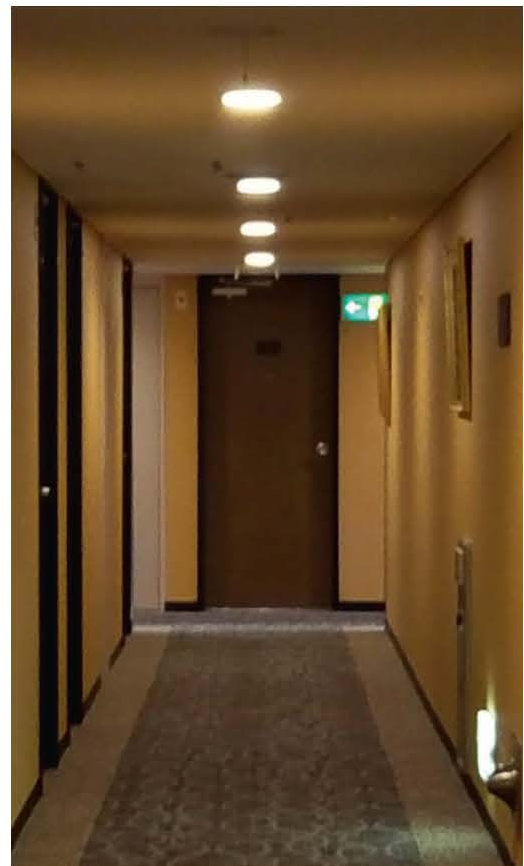

CREE


LUMILEDS

NICHIA

OSRAM

CUTOUT & DIMENSION

MODEL	POWER
AES231	18W
AES231	25W
DIMENSION	CUT HOLE
Ø178mm * H51.5mm Ø150-165 mm	
Ø178mm * H51.5mm Ø150-165 mm	

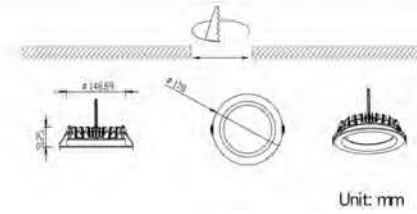

	25W	6500k	100°
	h(m) D(cm) E(max)		
1.0	247.7	712.1	
2.0	61.92	178.0	
3.0	27.52	79.12	
4.0	15.48	44.51	
5.0	9.908	28.48	



ORDERING INFORMATION

EXAMPLE : AES231-18W-80-30-B-PH-ND

Model	Wattage	CRI	CCT	FrameColor	DriverType	Dimming
AES231	18W	80	30	B	Ph	ND
AES231	18W	80	27 2700K	B Black	Tr Tridonic	ND Non Dim
	25W	90	30 3000K	W White	Ph Philips	TD Triac Dim
			35 3500K		Lf Lifud	VD 0/1-10VDim
			40 4000K			DA DALI Dim
			50 5000K			
			57 5700K			
			65 6500K			