



DOWN LIGHT

ROME B FAMILY



APPLICATION

Square Round ceiling- recessed for different application scenarios, with deep anti-glare lenses, with 54 ingress protection (IP54) and 90mm to 135 diameter range option. You can install it in : fashion shop, jewelry display and other high end lighting areas.


APPROVALS & STANDARDS

Saudi Standard SASO 2902 *	Energy Efficiency, functionality & labeling requirements for lighting products -Part2- As per IEC60598-2-3:2002+A1:2011 IEC60598-1:2014+A1:2017
IECEE certificate *	As per IEC60598-2-3:2002+A1:2011 IEC60598-1:2014+A1:2017
Power supply approval marks	UL/CSA/CE/ENEC/CCB/CCC
Degree of protection provided by enclosures, ingress protection(IP)	IEC 60529:2013


*: Approvals and certificate are under process.

TECHNICAL INFORMATION


FAMILY	ROME B
Wattage	8W 15W 25W
CRI	80 90
CCT	2700K 3000K 3500K 4000K 5000K 5700K 6500K
Beam	16° 20° 24° 38° 40° 60°
Lumen	8W (635.0lm - 886.0lm) 15W(1120.0lm - 1568.0lm) 24W (1872.0lm - 2040.0lm)
Finish	Silver Black Gold
Material	Die-casting aluminum body and heatsink, PMMA lenes
Driver	Tridonic Philips Lifud

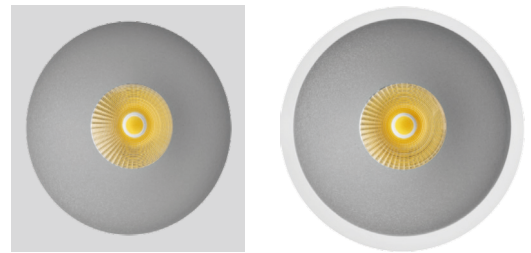


Beam angle for 8W



Beam angle for 15W & 24W



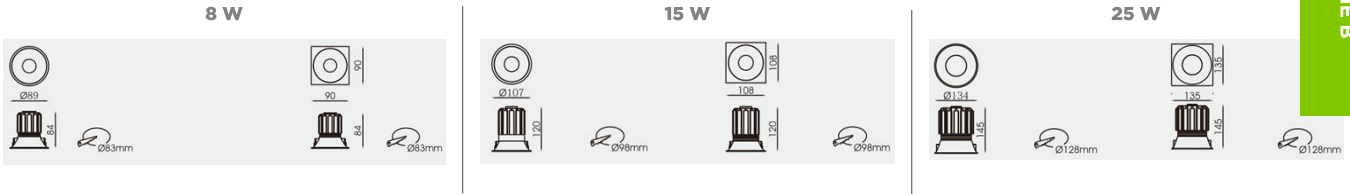

CUTOUT & DIMENSION

MODEL	POWER	DIMENSION	CUT HOLE
AES5210-R	8W	Ø89mm * H84mm	Ø83mm
AES5210-S	8W	L90mm*W90mm*H84mm	83*83mm
AES5210-R	15W	Ø107mm * H120mm	Ø98mm
AES5210-S	15W	L108mm*W108mm*H120mm	98*98mm
AES5210-R	25W	Ø134mm * H145mm	Ø128mm
AES5210-S	25W	L135mm*W135mm*H145mm	Ø128*128mm



ORDERING INFORMATION

EXAMPLE : AES5210-8W-80-30-S-W-24-PH-ND

Model	Wattage	CRI	CCT	Frame	Reflector	Beam	DriverType	Dimming
AES5210	8W	80	30	S	W	24°	Ph	ND
AES5210	8W	80	27 2700K	S Square	W White	15°	Tr Tridonic	ND Non Dim
	15W	90	30 3000K	R Round	B Black	20°	Ph Philips	TD Triac Dim
	25W		35 3500K		S Silver	24°	Lf Lifud	VD 0/1-10VDim
			40 4000K			38°		DA DALI Dim
			50 5000K			40°		
			57 5700K			60°		
			65 6500K					