



DOWN LIGHT ROME C FAMILY



APPLICATION

Recessed LED down light with high quality aluminum body, simple design to meet different requirements, with multiple power choices, excellent heat dissipation capability. You can install it in: supermarket, stores, halls, Hotel, Kitchen, Meeting Room, Shopping Mall, etc....



APPROVALS & STANDARDS

Saudi Standard SASO 2902 *	Energy Efficiency, functionality & labeling requirements for lighting products -Part2- As per IEC60598-2-3:2002+A1:2011 IEC60598-1:2014+A1:2017
IECEE certificate *	UL/CSA/CE/ENEC/CCB/CCC
Power supply approval marks	IEC 60529:2013
Degree of protection provided by enclosures, ingress protection(IP)	

*: Approvals and certificate are under process.




TECHNICAL INFORMATION

FAMILY	ROME C
Wattage	9W 15W 20W 30W 40W 60W
CRI	80 90
CCT	2700K 3000K 3500K 4000K 5000K 5700K 6500K
Beam	60°
Lumen	900lm 1500lm 2000lm 3000lm 4000lm 6000lm
Finish	White
Material	Die-casting aluminum body and heatsink, PMMA lenes
Driver	Tridonic Philips Lifud



CUTOUT & DIMENSION

MODEL	POWER	DIMENSION	CUT HOLE
AESDL1EC	9W	Ø108mm * H52mm	Ø95mm
	15W	Ø142mm * H65mm	Ø125mm
	20W	Ø158mm * H75mm	Ø140mm
	30W	Ø185mm * H88mm	Ø170mm
	40W	Ø226mm * H108mm	Ø210mm
	60W	Ø282mm * H130mm	Ø265mm

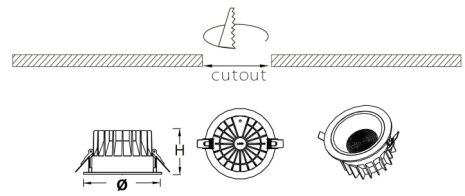

Unit: mm



ORDERING INFORMATION

EXAMPLE : AESDL1EC-15W-80-30-PH-ND

Model	Wattage	CRI	CCT	DriverType	Dimming
AESDL1EC	15W	80	30	Ph	ND
AESDL1EC	9W	80	27 2700K	Tr Tridonic	ND Non Dim
	15W	90	30 3000K	Ph Philips	TD Triac Dim
	20W		35 3500K	Lf Lifud	VD 0/1-10VDim
	30W		40 4000K		DA DALI Dim
	40W		50 5000K		
	60W		57 5700K		
			65 6500K		