



DOWN LIGHT

ROME C FAMILY



APPLICATION

Recessed LED down light with high quality aluminum body, Small and simple design to meet different requirement, with multiple beam angle choices, excellent heat dissipation capability. You can install it in: supermarket, stores, halls, Hotel, Kitchen, Meeting Room, Shopping Mall, etc....

APPROVALS & STANDARDS

Saudi Standard SASO 2902 *	Energy Efficiency, functionality & labeling requirements for lighting products -Part2- As per IEC60598-2-3:2002+A1:2011 IEC60598-1:2014+A1:2017
IECEE certificate *	As per IEC60598-2-3:2002+A1:2011 IEC60598-1:2014+A1:2017
Power supply approval marks	UL/CSA/CE/ENEC/CCB/CCC
Degree of protection provided by enclosures, ingress protection(IP)	IEC 60529:2013

*: Approvals and certificate are under process.


TECHNICAL INFORMATION

FAMILY	ROME C
Wattage	7W 12W 20W 30W
CRI	80 90
CCT	2700K 3000K 3500K 4000K 5000K 5700K 6500K
Beam	15° 24° 38° 60°
Lumen	700lm 1200lm 2000lm 3000lm
Finish	White
Material	Die-casting aluminum body and heatsink, PMMA lenes
Driver	Tridonic Philips Lifud



CUTOUT & DIMENSION

MODEL	POWER	DIMENSION	CUT HOLE
AESDLE	7W	Ø85mm * H70mm	Ø75mm
	12W	Ø100mm * H85mm	Ø85mm
	20W	Ø140mm * H105mm	Ø115mm
	30W	Ø175mm * H118mm	Ø150mm

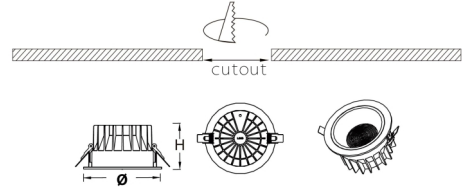

Unit: mm



ORDERING INFORMATION

EXAMPLE : AESDLE-12W-80-30-24-PH-ND

Model	Wattage	CRI	CCT	Beam	DriverType	Dimming
AESDLE	12W	80	30	24°	Ph	ND
AESDLE	7W	80	27 2700K	15°	Tr Tridonic	ND Non Dim
	12W	90	30 3000K	24°	Ph Philips	TD Triac Dim
	20W		35 3500K	38°	Lf Lifud	VD 0/1-10VDim
	30W		40 4000K	60°		DA DALI Dim
			50 5000K			
			57 5700K			
			65 6500K			