



MINI WALL WASHER



APPLICATION


Mini Wall washer series used for outdoor applications, standard sizes are 0.5m & 1m which could be connected in parallel or series to achieve any required length.

With IP66 level of protection (submerge under water), the fixture could be mounted inside floors walls, or ceilings, Ideally suited for architectural, landscape, theaters, bridges, etc...



IECEE certificate *	As per IEC60598-2-3:2002+A1:2011 IEC60598-1:2014+A1:2017
Power supply approval marks	UL/CSA/CE/ENEC/CCB/CCC
Degree of protection provided by enclosures, ingress protection(IP)	IEC 60529:2013

*: Approvals and certificate are under process.




TECHNICAL INFORMATION

FAMILY	CLASSIC MINI W3
Wattage/m	11W 18W
CRI	80 90
CCT	2700K 3000K 3500K 4000K 5000K 5700K 6500K
Beam	25° 45° 60° 80°
Lumen	18W(724lm-928lm) 9W(362lm-464lm)
Finish	Silver
Material	Die-casting aluminum body and heatsink, PMMA lenes
Driver	Tridonic Philips Lifud
Ambient (Ta) Temperature	-20°C to +50°C



CUTOUT & DIMENSION

MODEL	POWER	DIMENSION
AESW324A	11W	L500mm * W28mm*H52mm
AESW348A	18W	L1000mm * W28mm*H52mm

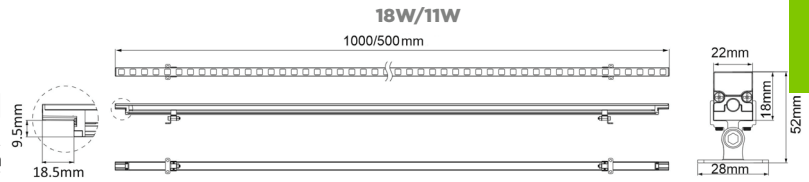

ORDERING INFORMATION

AESW348A-18W-80-30-NR-25-PH-ND

Model	Wattage	CRI	CCT	Led Engine	Beam	DriverType	Dimming
AESW348A	18W	80	30	NR	25°	Ph	ND
AESW324A	11W	80	27 2700K	R RGB	25°	Tr Tridonic	ND Non Dim
AESW348A	18W	90	30 3000K	NR Non RGB	45°	Ph Philips	VD 0/1-10VDim
			40 4000K		60°	Lf Lifud	DA DALI Dim
			50 5000K		80°		
			57 5700K				
			65 6500K				