



ALU. TRI-PROOF



APPLICATION

Manufactured to the highest standards, implementing high performance, economical and sustainable technologies, different diffusers available (clear, matt), with rigid aluminum profile for industrial and aggressive environment. You can install it in: parking garage, railway station, refrigerator warehouse, airport, exhibition center, etc....

APPROVALS & STANDARDS

Saudi Standard SASO 2902 *	Energy Efficiency, functionality & labeling requirements for lighting products -Part2- As per IEC60598-2-3:2002+A1:2011 IEC60598-1:2014+A1:2017
IECEE certificate *	As per IEC60598-2-3:2002+A1:2011 IEC60598-1:2014+A1:2017
Power supply approval marks	UL/CSA/CE/ENEC/CCB/CCC
Degree of protection provided by enclosures, ingress protection(IP)	IEC 60529:2013

*: Approvals and certificate are under process.


TECHNICAL INFORMATION

FAMILY	ECO TRI
Wattage	15W 30W 40W 60W 80W
CRI	80 90
CCT	3000K 4000K 5000K 5700K 6000K
Beam	120°
Lumen	1500lm 3000lm 4000lm 6000lm 8000lm
Finish	White
Diffuser type	PMMA opal matte, PMMA clear
Material	Die-casting aluminum body, PMMA diffuser
Driver	Tridonic Philips Lifud
Ambient (Ta) Temperature	-30°C to +50°C



DIMENSION

MODEL	POWER	DIMENSION
AES-TP1-15W	15W	L300mm*W89.6mm*H73.5mm
AES-TP1-30W	30W	L600mm*W89.6mm*H73.5mm
AES-TP1-40W	40W	L900mm*W89.6mm*H73.5mm
AES-TP1-60W	60W	L1200mm*W89.6mm*H73.5mm
AES-TP1-80W	80W	L1500mm*W89.6mm*H73.5mm

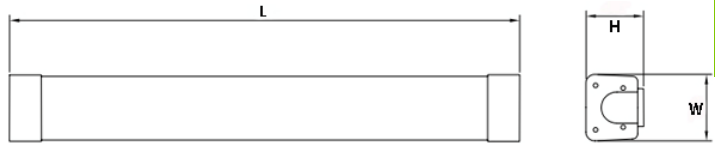

ORDERING INFORMATION

EXAMPLE : AES-TP1-30W-80-30-PMC-PH-ND

Model	Wattage	CRI	CCT	Diffuser	DriverType	Dimming
AES-TP1	30W	80	30	PMc	Ph	ND
AES-TP1	15W	80	30 3000K	PMom PMMA opal matte	Tr Tridonic	ND Non Dim
	30W	90	40 4000K	PMc PMMA clear	Ph Philips	VD 0/1-10VDim
	40W		50 5000K		Lf Lifud	DA DALI Dim
	60W		57 5700K			
	80W		60 6000K			